

RLH Industries, Inc. Fiber Card Shelf with AC/DC Power Supply




Description	Part Number
3-Card Shelf (24V)	8806-1231-02-A24
3-Card Shelf (48V)	8806-1231-02-A48
6-Card Shelf (24V)	8806-1229-01-A24
6-Card Shelf (48V)	8806-1229-01-A48
10-Card Shelf (24V)	8806-1230-02-A24
10-Card Shelf (48V)	8806-1230-02-A48
24V 1.2A Battery Box	8806-1203-04BB
24V 7.2A Battery Box	8806-1206-03BB
48V 1.2A Battery Box	8806-1204-02BB
48V 7.2A Battery Box	8806-1214-01BB


RLH Power Supply Modules can be ordered with a RLH Fiber Optic Link 5,8, or 12 Card shelf. The Power supply module when ordered with a card shelf requires (2) card positions. AC/DC modules can be ordered with an optional battery box (low-density or high-density) to supply temporary power in case of an outage.

General Specifications:

AC Input Range	100-240VAC
DC Output Voltage	A24: 27.6VDC A48: 54.2VDC
DC Output Current	A24: 0-2.8A A48: 0-1.4A
Operating Temperature	-20° to +60°C (-4° to +140°F)
Shelf Mounting	Factory installed, requires (2) card slot positions
LED Indicators	AC Input: Green DC Output: Blue
Warranty	Lifetime

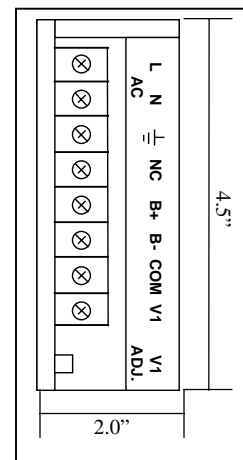

Power Module

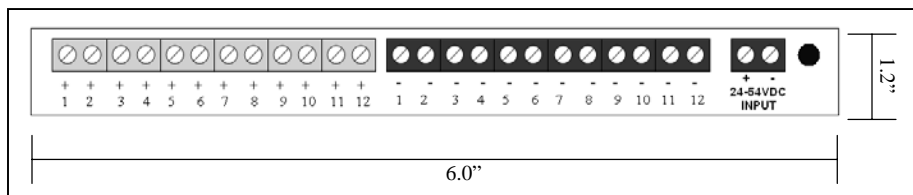

DC Power Strip (12-Position)