

# MOUNTING INSTRUCTIONS FOR 2 & 5 CARD FIBER TELCO PEDESTAL

DATA SHEET #41  
ISSUE# 1 05-15-00



2 CARD PEDESTAL ACCOMMODATES UP TO ONE 4 CARD REMOTE (NIU) HSG, PLUS PUNCH DOWN BLOCK.

5 CARD PEDESTAL ACCOMMODATES UP TO ONE 8 CARD REMOTE (NIU) HSG, PLUS PUNCH DOWN. PLY WOOD IS OFFSET FORWARD TO ALLOW FOR THE SIZE OF REMOTE (NIU) SHELF GIVING THE USER 9.00 INCHES OF CLEARANCE DEPTH.

STUB UP CONDUIT NO MORE THAN 5 INCHES FROM INSIDE BOTTOM EDGE OF PEDESTAL SO THAT FIBER CABLE CAN BE EASILY PULLED INTO AND OUT OF CONDUIT.

DRIVE TWO SUPPORTING STAKES TO MOUNT ALONG INSIDE OF PEDESTAL BASE. SUPPORTING STAKES ARE PRE-DRILLED. NEXT DRILL HOLES THROUGH PEDESTAL BASE TO ALIGN WITH PRE-DRILLED MOUNTING STAKE HOLES. BOLT PEDESTAL AND STAKE TOGETHER WITH STAINLESS STEEL BOLTS PROVIDED.

IMPORTANT: USE RIVER ROCK OR PROPER ABSORBING BASE MATERIAL INSIDE BOTTOM OF PEDESTAL FOR MOISTURE AND RODENT PREVENTION. USE EXPANSION FOAM TO SEAL CONDUIT OPENINGS AFTER ALL TELCO AND FIBER CABLES ARE IN PLACE.

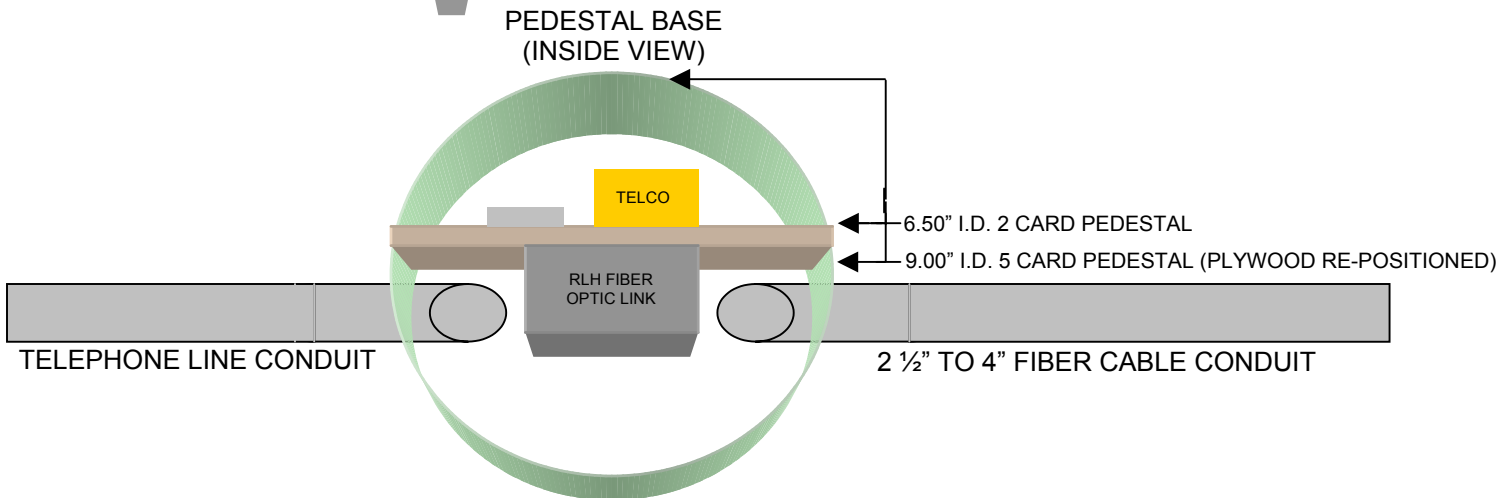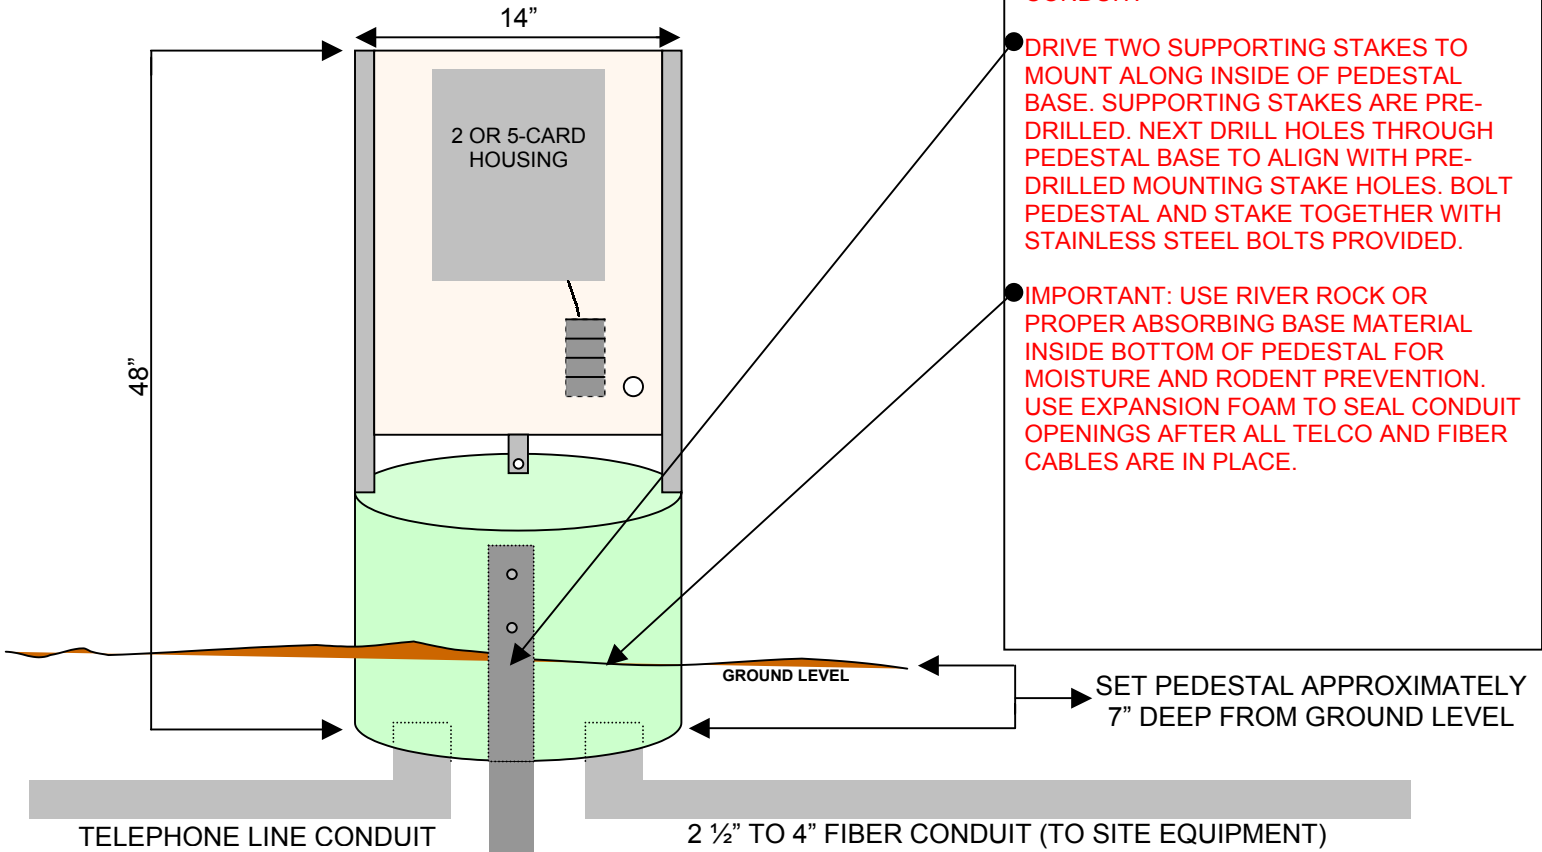

CALL RLH INDUSTRIES, INC. AT 714-366-2503 OR OFFICE AT 800-877-1672  
24 HOURS 7 DAYS A WEEK FOR FURTHER ASSISTANCE

VISIT US AT: [WWW.FIBEROPTICLINK.COM](http://WWW.FIBEROPTICLINK.COM)  
EMAIL US AT: [INFO@FIBEROPTICLINK.COM](mailto:INFO@FIBEROPTICLINK.COM)