


### DATA SHEET

### 36"x 36"x 16" Galvanized OPGW Outdoor Splice Cabinet

The RLH 36"x36"x16" OPGW Outdoor Splice Cabinet is a powder coated, galvanized steel, NEMA 4 style outdoor fiber splice cabinet with neoprene door seal, dual 1/4 turn hex latches (bottom latch pad lockable), fire (ASTM E84) treated plywood backboard, knockouts for conduits, uni-strut mounting points, fiber loop storage hooks, and a ground strap from cabinet to the door. It also features a bottom OPGW slot with bug resistant grommet.

#### Key Features

- Outdoor rated galvanized steel cabinet
- OPGW slot with bug resistant grommet
- Multiple conduit knockout entrance locations and sizes
- Weight of Cabinet: 156 lbs.
- Foam door gasket assures watertight and dust seal
- Fire treated 3/4" plywood backboard
- Document / literature pocket & Door Limit Stop

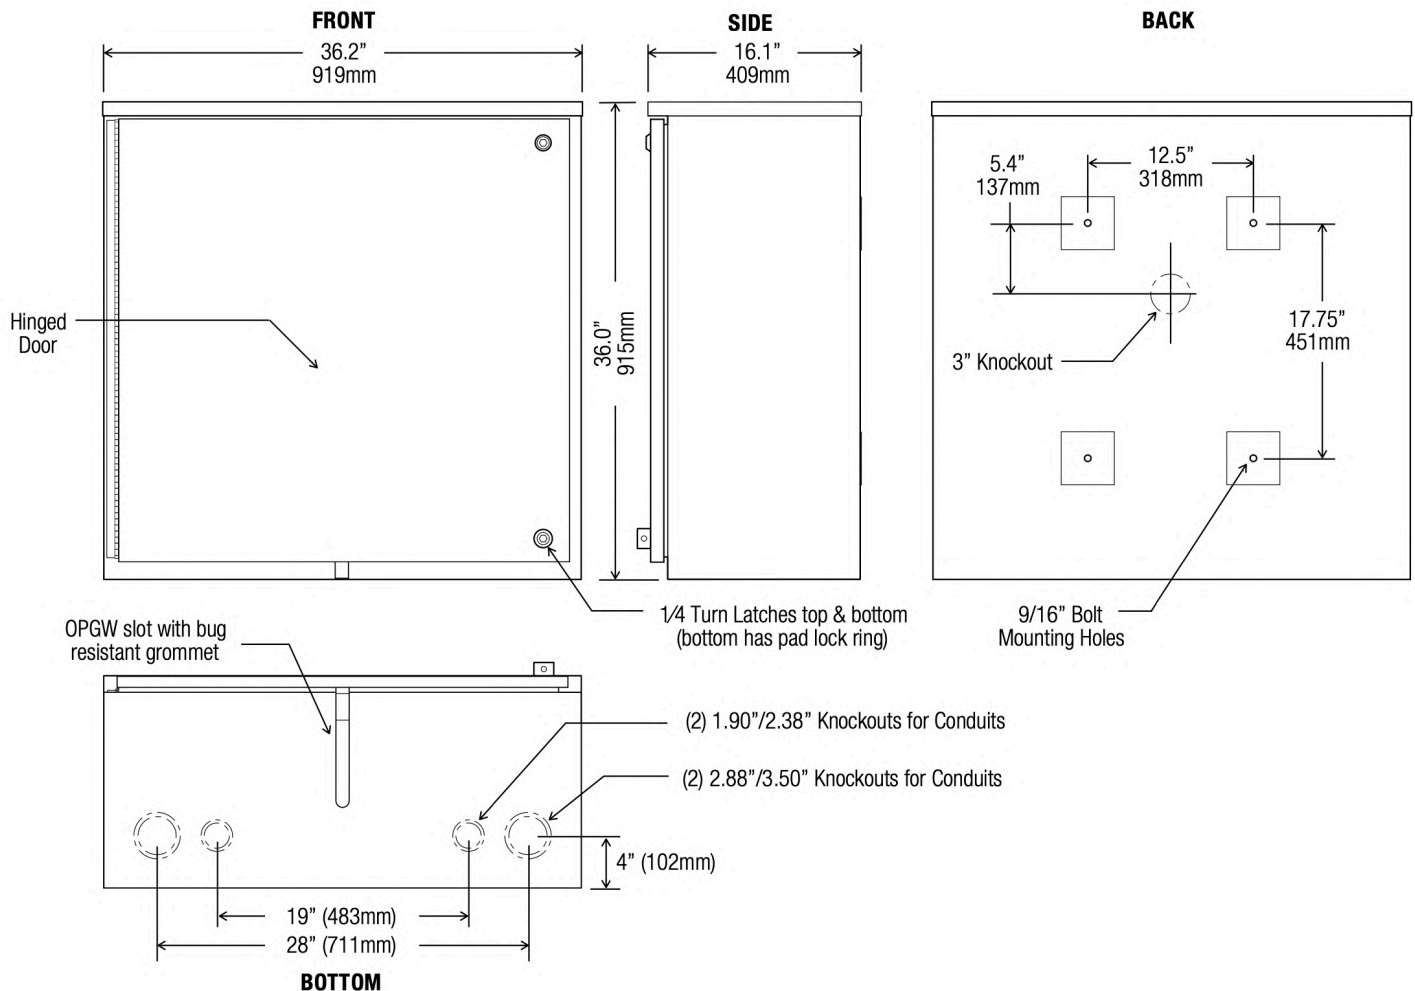


Splice Cabinet Exterior Dimensions

### DATA SHEET

www.fiberopticlink.com

### Splice Cabinet Interior Features

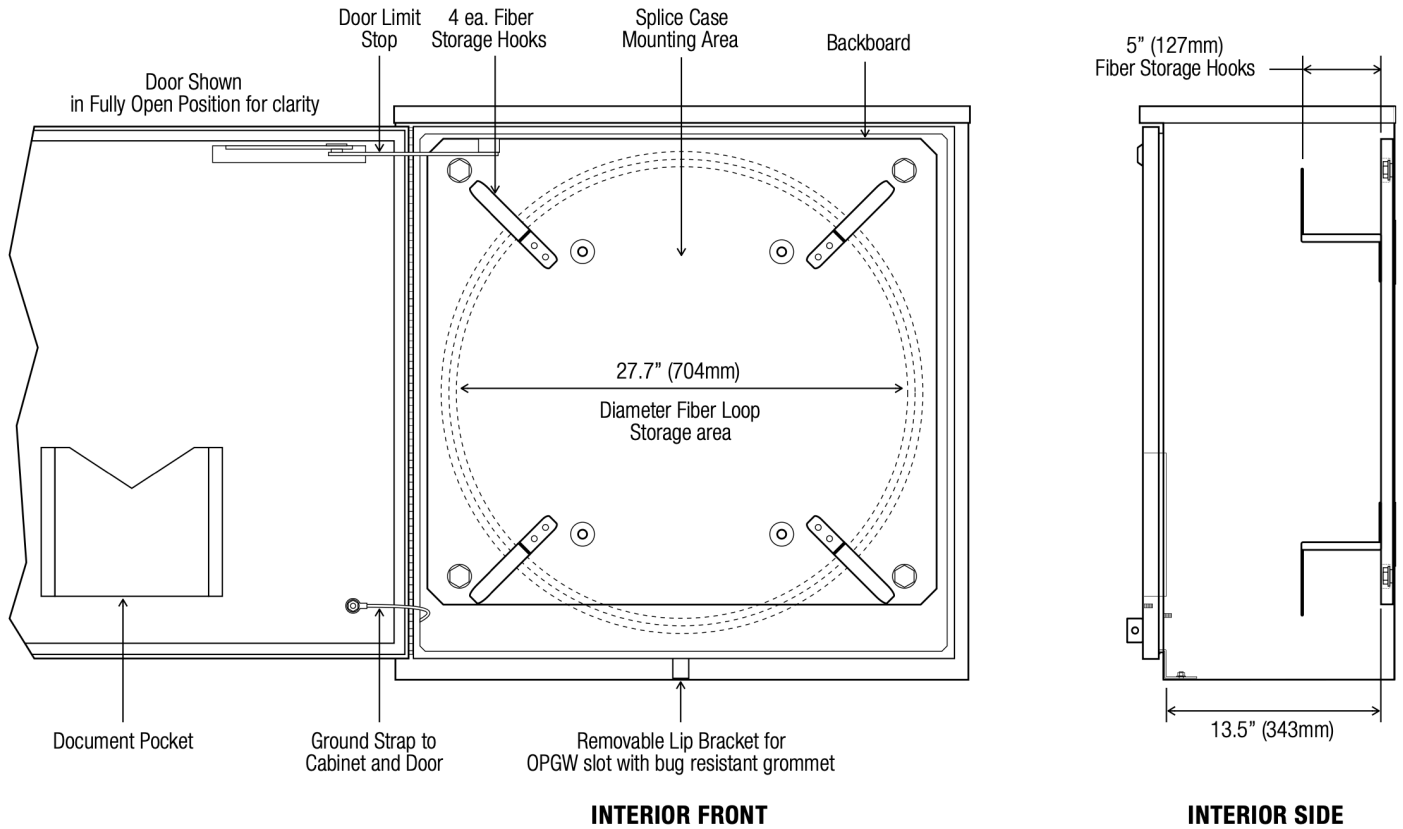

### Ordering Information

Description	Part Number
H36" x W36" x D16" OPGW Galvanized Splice Cabinet	RLH-363616-G-291

**DATA SHEET**[www.fiberopticlink.com](http://www.fiberopticlink.com)**Contact**

---

By Mail:	Att: Sales RLH Industries, Inc. 936 N. Main St. Orange, CA 92867
----------	---

---

By Phone: Sales / Service Mon - Fri, 6am - 6pm, PST	Local	714-532-1672
	Toll Free	800-877-1672 866-DO-FIBER

---

By Email:	<a href="mailto:info@fiberopticlink.com">info@fiberopticlink.com</a>
-----------	--

---

By FAX:	714-532-1885
---------	--------------

**Tech Support**

---

By Email:	<a href="mailto:support@fiberopticlink.com">support@fiberopticlink.com</a>
-----------	--

---

By Phone:	Toll Free	855-754-2497 855-RLH-24X7
-----------	-----------	------------------------------