



RLH Industries, Inc.

fiberopticlink.com

PRODUCT
DATA SHEET

DS-149 2025-1002

8+12 Managed Gigabit SFP Ethernet Switch

ETH-812GM-1

High SFP Port Count Industrial Ethernet Switch

RLH managed industrial switches are engineered to provide reliable network performance in demanding environments. The 8+12 Managed Gigabit SFP switch provides 8 copper Gigabit Ethernet ports and 12 fiber Gigabit Ethernet SFP ports for maximum connectivity in a compact form factor. A comprehensive set of management features provide a wide array of configuration and monitoring options required for various industrial applications.

This environmentally hardened, layer 3 Ethernet switch may be DIN rail or wall mounted, and is engineered to meet the demands of networking, utility and automation environments.

Features

- Hardened to operate in -40°C to +75°C (-40°F to +167°F)
- 8 ports - 10/100/1000Base-T(X) Ethernet
- 12 ports - 10/100/1000Base-F(X) SFP slots
- Supports Jumbo Frames
- Auto MDI/MDI-X
- Store-and-forward switching architecture
- Rugged IP30 housing
- 12-48VDC redundant power inputs with built-in alarm relay
- Overload and reverse polarity protection
- DIN rail & wall mountable


Network Management

- Layer 3 switch
- Static Routing
- Configuration via Web, CLI command, Telnet, SNMP & SSH
- Supports SNMPv3
- Supports IEEE 802.1q VLANs



8+12 Managed Gigabit SFP Ethernet Switch

Dimensions

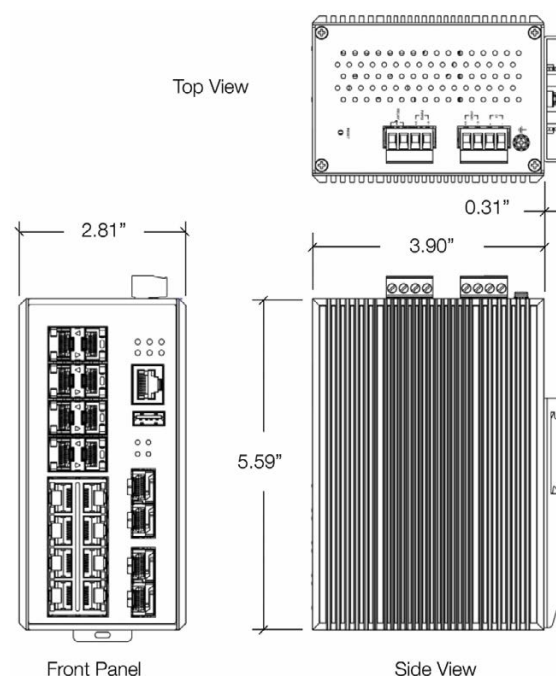



General Specifications

Data Process:	Store and Forward	
Standards:	IEEE 802.3 10Base-T (Ethernet) IEEE 802.3u 100Base-TX (Fast Ethernet) IEEE 802.1p Quality of Service (QoS) IEEE 802.3af Power over Ethernet (PoE) IEEE 802.3at Power over Ethernet Plus (PoE+) IEEE 802.3ad Link Aggregation (LACP) IEEE 802.3x Flow Control	IEEE 802.1d STP (Spanning Tree Protocol) IEEE 802.1w RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s MSTP (Multiple Spanning Tree Protocol) IEEE 802.1Q Virtual Local Area Network (VLAN) IEEE 802.1AB Link Layer Discovery Protocol (LLDP) ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switching) IEEE 802.1X Network Authentication
Management:	IPv4/IPv6, SNMP v1/v2c/v3, LLDP, LLDP-MED, HTTP, HTTPS, SSHv2 telnet, DHCP client, DHCPv6 client, DHCP server, Port Mirror, DNS client/proxy, IP based Access Filter, ICMPv6, syslog, Time Zone /Daylight Saving, NTP client, RMON, sFlow, Loop detection, Console Port, USB configuration backup/restore, Power lost warning, relay trigger	
Security:	Port-based/Single/Multi 802.1X, ACL(Port/Rate Limiters/ACE), MAC-based Authentication, VLAN assignment, QoS Assignment, Private VLAN, Guest VLAN, RADIUS accounting, TACACS+, IP MAC binding, WEB/CLI authentication, Authorization (15 levels), Port Security Limit Control, ACLs for filtering/policing/port copy, IP source guard, ARP Inspection	
L2 Switching:	Port/MAC/Protocol/IP Subnet-based VLAN, GARP/GVRP, Loop Guard, Link Aggregation static/LACP, BPDU guard, Error disable recovery, IGMP snooping v2/v3, MLD snooping v1/v2, IGMP filtering, IPMC throttling / filtering leave proxy, DHCP snooping, G.8032 v1/v2	
L3 Switching:	DHCP option82, static routes	
QoS:	802.1p Queueing, Input priority mapping, Storm control for Unicast/Multicast/Broadcast, Port/Queue/ACL policer, Port egress shaper, Queue egress shaper, DiffServ (DSCP), Tag remarking, Scheduler mode	
Power Saving:	ActiPHY, PerfectReach, IEEE 802.3az EEE power management	
Network Redundancy:	STP/RSTP/MSTP, port trunk with LACP, ERPS v1/v2 (<50ms)	
Configuration:	HTTP, HTTPS, Telnet, SSH, CLI, TFTP, SNMP v3	
System Diagnostics:	Dual Image Protection, PING, PING6	
SNMP MIB & RFC Standards:	RFC 1213 MIB II RFC 1215 TRAPS RFC 2613 SMON – PortCopy RFC 2674 VLAN MIB RFC 2819 RMON (group 1, 2, 3, and 9) RFC 2863 interface group MIB using SMI v2 RFC 3635 Ethernet-like RFC 3636 802.3 MAU RFC 4133 entity MIB v3 RFC 4188 bridge RFC 4668 RADIUS auth. client RFC 4670 RADIUS accounting	IEEE-802.1Q bridge MIB 2008 IEEE 802.1 MSTP IEEE 802.1AB LLDP-MIB (LLDP MIB included in a clause of the STD) IEEE 802.3ad (LACP MIB included in a clause of the STD) IEEE 802.1X (PAE MIB included in a clause of the STD) TIA 1057 LLDP-MED (MIB is part of the STD) Private MIB support RFC 3411 SNMP management frameworks RFC 3414 user-based security model for SNMPv3 RFC 3415 view-based access control model for SNMP RFC 4292 IP forwarding table RFC 4293 management information base for the Internet Protocol (IP) RFC 5519 multicast group membership discovery



General Specifications (cont.)

Switching Fabric (Back Plane):	40Gbps
Priority Queues:	8
Max. Number of VLANs:	4095
VLAN ID Range:	VID 1 to 4095
Memory Buffer:	4Mbits
Jumbo Frame:	9.6Kbytes
MAC Table Size:	8k
IGMP Group:	1024
Transfer Rate:	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet port
RJ45 Ports:	8 - 10/100/1000 Base-T(X) with PoE-PSE (30W/Port) Auto-Negotiation, Full/Half Duplex, Auto-MDI/MDI-X
Fiber Port:	12 - 100/1000Base-(F)X SFP slots
Wavelength:	Depends on SFP modules
LED Indicators:	System: Power 1, Power 2, Status, Master, Ring
	Ethernet ports: Speed/Link/Active
	SFP: Link/Active
RS232 Serial Console:	1 - RS232 in RJ45 connector with console cable, baud rate 115,200bps,8,N,1
Configuration Backup:	1 - USB 2.0 host (type-A) for configuration backup/restore
Relay Contact:	24 VDC, 1A resistive
DI:	1 - Digital Input (DI): State 0: -30~8VDC / State 1: 10~30VDC, Max. input current: 8mA
Network Cable:	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m)
	100Base-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m)
	1000Base-TX: 4-pair UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)
Optical Cable:	Multi-mode cable - 50/125um or 62.5/125um
	Single-mode cable - 9/125um or 10/125um
Input Voltage:	Dual 12-48VDC redundant power inputs
Overload Current Protection:	2 ea. removable 4-contact terminal blocks
Reverse Polarity Protection:	Slow-Blow Fuse
System Power Consumption:	Built in
Max. PoE Power Budget:	Max. 19W full loading



General Specifications (cont.)

Housing:	Metal, IP30 protection
Dimensions (W x H x D):	71.5 x 142 x 99 mm (2.81 x 5.59 x 3.9 inch)
Weight:	Unit weight: 1.562 kg (3.44 lbs.), Shipping weight: 1.902 kg (4.19 lbs.)
Mounting:	DIN-Rail Mounting, Wall Mounting
Operating Temperature:	-40°C to 75°C (-40°F to 167°F)
Storage Temperature:	-40°C to 85°C (-40°F to 185°F)
Ambient Relative Humidity:	5 to 95%, (non-condensing)
EMI:	FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A
EMS:	CE EN55035/EN61000-6-2, IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field)
Physical:	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)
Safety:	CE, FCC Class A, UL 61010-1, UL 61010-2-201, File Number: E544369
Compliance:	NDAA, TAA, NEMA TS2 (ITS), RoHS and REACH compliant
MTBF:	481,511 hrs. - Telcordia SR-332, Issue 3, GB, 25°C
Warranty:	5 Years - Visit www.fiberopticlink.com for warranty details

Ordering Information

Description	Part Number
8+12 Managed Gigabit Industrial Ethernet Switch, (8) Gigabit Ethernet PoE (12) Dual Rate SFP Slots, 12-48VDC	ETH-812GM-1

- Single fiber (bi-directional) systems must always be paired, side A and side B

Contact

By Mail:	ATTN: Sales RLH Industries, Inc. 936 N. Main Street Orange, CA 92867	
By Phone:	Local	714-532-1672
Sales/Service:	Toll Free	800-877-1672
By Email:	info@fiberopticlink.com	
By Fax:	714-532-1885	

Support

By Email:	support@fiberopticlink.com
By Phone:	Toll Free 855-754-2497