

DATA SHEET

Dual Access Galvanized Enclosure

Long-Lasting Protection for Housing Electrical Components

RLH Dual Access galvanized steel enclosures provide long-lasting, all-season protection for housing electrical components. These enclosures provide 2 separate, lockable enclosure sections in a single unit. This is an ideal solution for the Copper Fiber Junction (CFJ), or where controlling access to connected equipment is important.

Manufactured to NEMA 4X standards from 14 gauge steel, powder coated light grey and highly resistant to corrosion. They are suitable for both indoor and extreme outdoor environments.

Each side is a full-featured, secure enclosure, equipped with a hinged door and quarter-turn latches, hardened padlock ring, documentation pocket, foam gasket seal, knockouts, vents, and treated and painted plywood backboard.

The enclosure comes with mounting feet and hardware, and knockouts are provided in the divider panel for pass through of wiring, fiber, or conduit between the two compartments.

Available options include pole mount bracket with bolt or strap capability, rack mount rails, exhaust fans with thermostat, custom color, company logo and more.

Key Features

- Hinged door with:
 - Hardened Padlock Locking Rings
 - Quarter-turn latches
 - Door limit stops
 - Document pockets
 - Neoprene gasket seals
- Powder coated, 14 gauge galvanized steel construction
- Bottom knockouts, from 3/4" to 4"
- 1 3/4" section divider knockouts
- 8-position ground bar, #2 to #14
- Weatherproof vents
- Treated & painted 3/4" plywood backboard
- Frame mounting feet and attaching hardware
- Optional pole mount bracket



Dual Access Galvanized Enclosure



Open

DATA SHEET

www.fiberopticlink.com



Ordering Information

Description	Mounting	Part Number
32" X 40" X 15" Galvanized Steel Dual Access Enclosure with Treated 3/4" Plywood Backboard	Mounting Feet	8806-1296-01GDA
32" X 40" X 15" Galvanized Steel Dual Access Enclosure with Treated 3/4" Plywood Backboard and Pole Mount Bracket	Pole Mount Kit	8806-1296-01GDA-PMK
40" X 42" X 15" Galvanized Steel Dual Access Enclosure with Treated 3/4" Plywood Backboard	Mounting Feet	8806-1296-05GDA
40" X 42" X 15" Galvanized Steel Dual Access Enclosure with Treated 3/4" Plywood Backboard and Pole Mount Bracket	Pole Mount Kit	8806-1296-05GDA-PMK

Key Specifications

Construction	14 Ga. galvanized steel, powder coated light grey with NEMA 4X rain proof vents Fire treated and painted 3/4" plywood backboard, integrated ground bar
Knockouts	3/4" - 4" bottom conduit knockouts, 1-3/4" knockouts in section divider Four 1-3/4" I.D. on center divider panel
Door Hardware	Hinged, welded door with continuous neoprene door gasket, literature pocket, and latching door stop Includes quarter-turn recessed door latches with hardened steel padlock ring
Mounting Hardware	Brackets and attaching hardware for wall/H-Frame mounting Cabinet comes pre-equipped with threaded inserts for pole mounting Optional pole mount bracket available

Enclosure Features



DATA SHEET


www.fiber opticlink.com

Optional Equipment

RLH enclosures are available with optional equipment for specific applications through our factory modification service. Please contact an RLH sales representative for additional information.




Auxilliary Fan Kits



Combination Heater/Fan Kits



Heater Kits

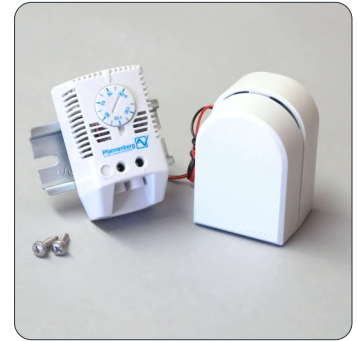

Standard Mini Fan Kits

Contact

By Mail:

Att: Sales
RLH Industries, Inc.
936 N. Main St.
Orange, CA 92867

By Phone:

Sales / Service
Mon - Fri, 6am - 6pm, PST

Local 714-532-1672

Toll Free 800-877-1672
866-DO-FIBER

By Email:

info@fiber opticlink.com

By FAX:

714-532-1885

Tech Support

By Email:

support@fiber opticlink.com

By Phone:

Toll Free 855-754-2497
855-RLH-24X7