




**RLH Industries, Inc.**  
**Weatherproof Aluminum Cabinet**  
**40"x32"x15"**

PART NUMBER	DESCRIPTION
8806-1296-01	(Empty Cabinet) with plywood backboard and pole mount bracket
8806-1441-01	5-Card Telco interface unit with pre-wired terminal
8806-1442-01	8-Card Telco interface unit with pre-wired terminal
8806-1443-01	12-Card Telco interface unit with pre-wired terminal




**Cabinet consists of:**

- Sturdy and secure powder coated gray aluminum enclosure for use in light to heavy-duty outdoor/indoor applications.
- Vented for both airflow and drainage.
- Hinged door with pad lockable latch.
- 3/4" to 4" conduit entrance knockouts provided at bottom of cabinet.
- Treated 3/4" plywood backboard measuring 37"x30".
- Sturdy aluminum removable pole mount bracket (bolts or lags not included).
- 5/16" threaded rear back corners for H-fixture setups (hardware included).

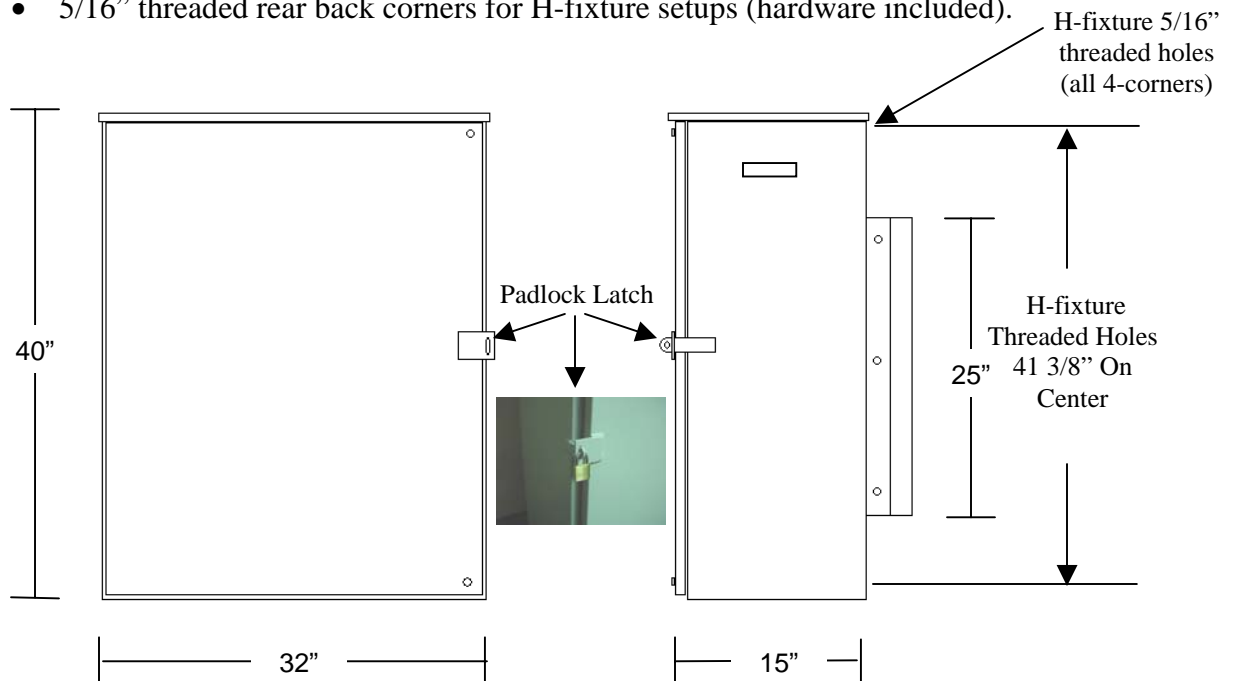

**Installation**

1. Unbolt and remove the pole mount bracket.
2. Using the pole mount bracket as a template, drill two holes through the pole or use sturdy lag bolts. Note: good practice is to install cabinet at eye level or six feet above ground level.
3. Bolt pole mount bracket to the pole (bolts not included).
4. Route conduit for cable through knockouts at the bottom of the cabinet.

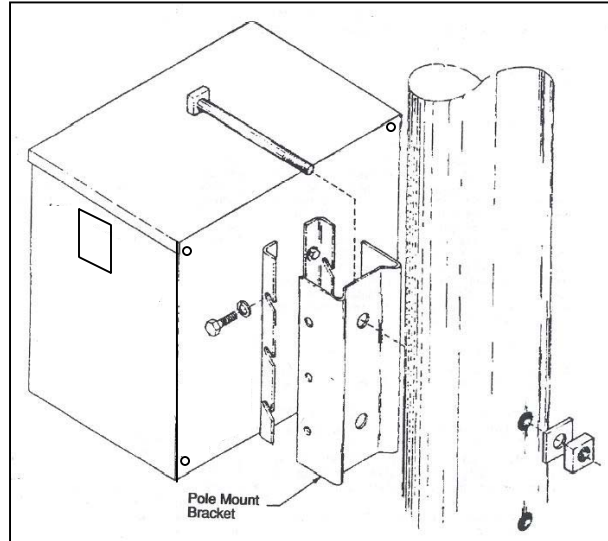

H-fixture Hardware  
(Included)



Optional Pole Mount Bracket  
(Included)

