



Small Semi Buried Pedestal

SBP-02-A-1

Small Footprint Semi-Buried Pedestal

The RLH small semi-buried pedestal is an all-dielectric enclosure with a small footprint designed for installation of fiber optic cable or other telecommunications equipment which requires a wooden backboard.

It features a vented lift-off cover and corrugated channel base. The lift-off cover allows full access to internal working area, and has a self-latching lock that is accessed using a hex style Can Wrench. A fire treated plywood backboard is pre-installed for mounting equipment or securing splicing and cable management.

The compact base is approximately W17.5" x D17", and the pedestal stands approximately 36" tall when installed. The base provides ample room for entry of multiple large cables, including conduit. The open bottom entry allows technicians to easily slide the base over existing cable applications. No mounting stakes or platforms are required.

RLH Pedestals may be customized for your particular application through our factory modification program.

Features

- All-dielectric construction
- Semi-buried base, no mounting stakes required
- Fire treated and painted ¾" plywood backboard
- Self-locking cover with hex head release
- 11-position ground bar, accepts #14 to #1/0 AWG ground wire
- Removable splice closure bracket bar
- Oversized, interlocking base for solid foundation
- Heat dissipation vents for sensitive equipment
- Slim, unobtrusive design has minimum visual impact
- Removable cover permits 360° access to equipment
- Available with terminal options
- Made in USA



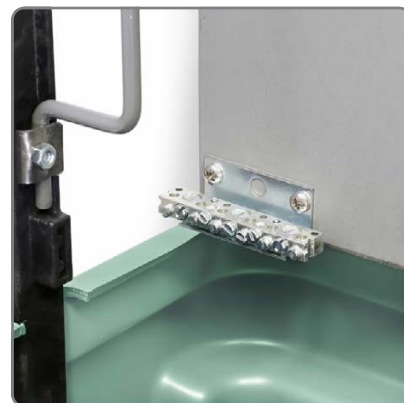
Small Semi-Buried Pedestal



Open Showing Backboard



Key Components

*Backboard**Hex Lock**Ground Bar*

General Specifications

Construction:	All-dielectric high performance molded thermoplastic with backboard and self-locking cover
Mounting Style:	Semi-buried, approximately 36" above grade; pedestal should be buried approximately 12" below grade
Included:	11.5" (W) x 19" (H) fire treated, painted 3/4" plywood backboard 11-position ground bar, wire capacity (Qty. 8 – #14 to #6 AWG, Qty. 3 – #14 to #1/0 AWG)
Options:	Fiber connectivity and cable accessories
Size:	17.5" (W) x 17" (L) x 48.5" (H), (440mm x 430mm x 1230mm) *Unburied

Ordering Information

Description	Part Number
H48" x W17.5" x D17" with 3/4" Fire Retardant Plywood Backboard	SBP-02-A-1

Contact

By Mail:	ATTN: Sales RLH Industries, Inc. 936 N. Main Street Orange, CA 92867	
By Phone:	Local	714-532-1672
Sales/Service	Toll Free	800-877-1672
Mon - Fri, 6am - 6pm, PST		866-DO-FIBER
By Email:	info@fiber ^{optic} link.com	
By Fax:	714-532-1885	

Support

By Email:	support@fiber ^{optic} link.com	
By Phone:	Toll Free	855-754-2497
		855-RLH-24X7